

Introduction

This Guidance Note gives general information about the visual inspection of welds in structural steelwork for bridges.

Scope of inspection

As explained in GN 6.01, weld quality levels are specified in EN 1090-2 (Ref 1) in relation to 'execution class' and the MPS (Ref 2), which will normally be adopted by designers and specifiers, says that class EXC3 is appropriate for most bridge steelwork.

Visual examination is always required over the full length of all welds and it is advisable to carry this out as soon as the weld is completed to ensure there are no unacceptable surface imperfections. If surface imperfections are detected, EN 1090-2 states that the weld shall be surface tested by MT (or penetrant testing). The standard also defines minimum hold times after welding before supplementary NDT takes place, although it is prudent to conduct visual inspection as welding progresses to enable obvious problems to be addressed immediately.

EN 1090-2 also provides for the execution standard to identify specific joints for inspection together with the extent and method of testing. This is to accommodate more stringent examination when fatigue strength requirements are higher.

Method of visual inspection

EN 1090-2 states that visual inspection shall be conducted in accordance with EN 970 (Ref 3). The standard describes examination conditions and equipment necessary for effective visual inspection. The principal requirement being to ensure that all welds are present and in the correct location and are of the size specified on the drawings or welding procedure.

Size is specified according the convention "z" for leg length or "a" for throat thickness. UK practice to date mostly uses leg length to define weld size, however European practice uses throat thickness and the detailer needs to make it absolutely clear which convention is being used, to avoid misunderstanding.

EN 1090-2 also states that particular attention shall be paid to welded branch connections in

hollow sections and emphasizes the key areas for circular, square and rectangular sections where the shape and surface of welds needs careful attention.

Acceptance criteria

EN 1090-2 requires that, for EXC 3, joints the acceptance criteria for weld imperfections is Quality Level B to EN 5817 (Ref 4), except for "Incorrect toe" and "Micro lack of fusion", which are not to be taken into account. Additional requirements for weld geometry and profile need to be specified. The MPS (Ref.4) provides a vehicle for specifying alternative acceptance criteria relevant to geometry and profile.

The MPS also proposes that limits for throat thickness of fillet welds are too tight and not practical in a production environment. Unless excessive throat thickness is detrimental, the document recommends that Quality Level D (unlimited) shall apply.

For joints where an enhanced level of quality is required to meet design fatigue strength requirements, EN 1090-2 Table 17 gives additional requirements for class EXC4 as Quality Level B+. In addition the table also gives further supplementary requirements for bridge decks. These are more stringent acceptance standards for imperfection types over and above Quality Level B.

Generally the requirements for Quality Level B+ are not practically achievable in routine production. Indeed normal welding procedure and welder qualification tests are not assessed against acceptance criteria at this level. If a higher quality level is required, this should be specified for each relevant joint detail. Again the MPS can be used to specify more stringent acceptance criteria.

EN 1090-2 suggests that non-conforming welds be judged individually and evaluation should be based on the function of the component and the characteristics of the defect in terms of type, size and location in order to determine acceptability. Reference back to the design standard may be used to support the evaluation.

Guidance Note

No. 6.06

The imperfections that can be determined and assessed by visual examination are size and shape, cracks, cavities, removal of slag and spatter, stray arcing, surface breaking porosity, undercut, linear misalignment. For EXC 3 cracks and cavities are not permitted, slag and spatter shall be removed, stray arcing shall be lightly ground and the visual check supplemented by MPI of the affected area. Surface breaking porosity and undercut need to be carefully measured to assess acceptability.

Linear misalignment also needs measuring and assessing against the acceptance criteria. Out of tolerance misalignment may be acceptable subject to a design check and unless there is an aesthetic reason to correct the error it is better to leave an otherwise acceptable weld rather than risk an unsatisfactory repair.

The results from inspections should be recorded formally in a report giving details of the items examined, weld identification and acceptance criteria.

Figure 1 illustrates typical weld defects.

Repair

Where a visual inspection identifies defects repair becomes necessary. In some cases this might involve a simple localized light grinding or dressing to correct the problem and it is not practical to report these.

For more substantial repairs which are reported through non-conformance and corrective action procedures, the repair is likely to involve gouging and welding. It is necessary to maintain control by implementing a repair procedure either of a generic nature or specifically developed to correct the problem. In either case, the completed repair area needs re-examination and reporting.

Inspection personnel

All inspection to ensure the quality of the completed welding should be carried out by appropriately qualified and experienced personnel. EN 970 requires personnel be familiar with relevant standards, rules and specifications, be informed about the welding procedure used and have good vision which should be checked every twelve months.

In many cases, the services of an independent testing organization will be engaged, in addition to the inspection carried out by the fabricator. This independent organization will normally place an inspector at the works on a full- or part-time basis to monitor the inspection carried out by the fabricator as part of the production process, and also to carry out verification testing in parallel.

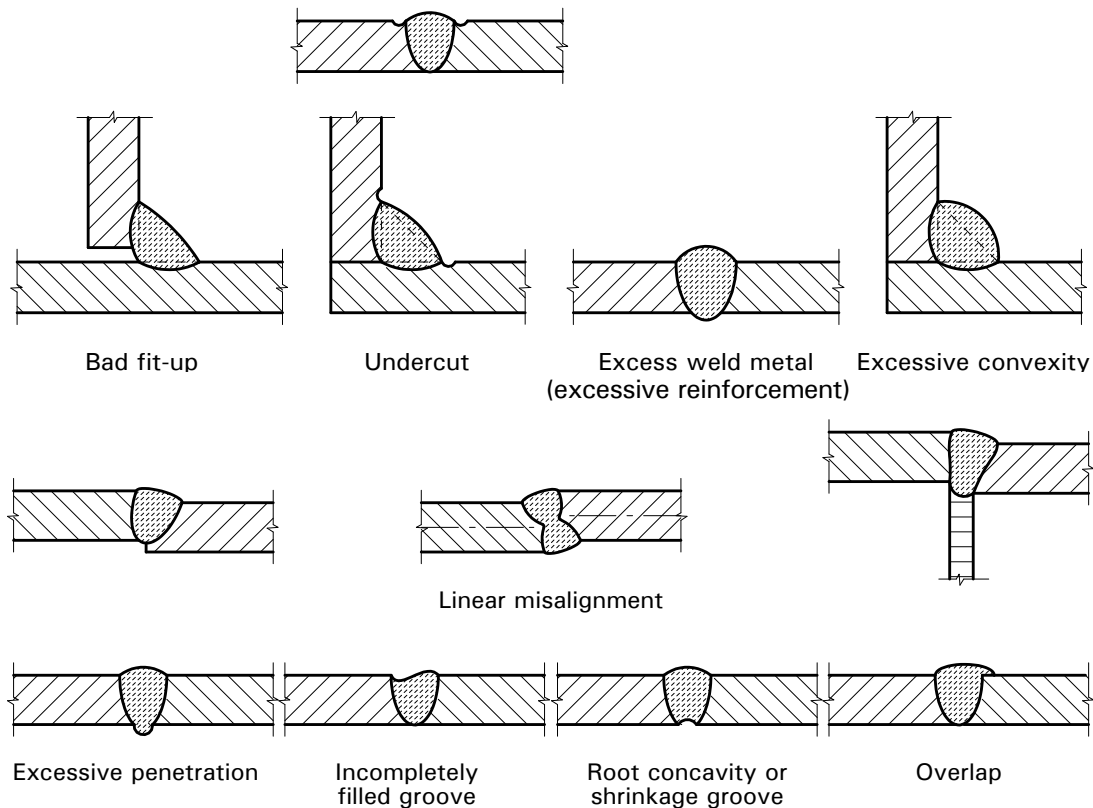


Figure 1 Typical weld defects or discontinuities

References

1. EN 1090-2: 2008, Execution of steel structures and aluminium structures. Technical requirements for steel structures.
2. Steel Bridge Group: Model Project Specification for the execution of steelwork in bridges (P382), SCI, 2009.
3. EN 970: 1997, Non-destructive examination of fusion welds - Visual examination.
4. EN ISO 5817: 2007, Welding. Fusion-welded joints in steel, nickel, titanium and their alloys (beam welding excluded). Quality levels for imperfections.